

(00) 340382230000000009



Logomatic 920 RFID

Industrial RFID-solutions for
FlagTag-On-Demand



Logomatic 920 RFID

Print features

- ✓ thermal transfer or direct thermal
- ✓ pre-set quick release print engine with no online adjustment
- ✓ permanent print engine dot checking
- ✓ labelling speed: up to 80 labels/h (depending on label size, telescope stroke)
- ✓ print width: 219 mm
- ✓ print resolution: 300 dpi
- ✓ label throat width: 220 mm
- ✓ fonts: 10 fixed and 4 scaleable fonts
- ✓ barcodes: all common linear and 2D barcodes
- ✓ logotype
- ✓ 400 Mhz 32-bit RISC CPU
- ✓ 2 MB CMOS memory
- ✓ 128 MB work and graphics memory
- ✓ RFID integrated

Operational features

- ✓ colour touch screen display
- ✓ multi lingual operator surface
- ✓ built-in real-time clock
- ✓ individual programmable counters
- ✓ internal article data base

- ✓ error logging
- ✓ end of label roll sensor
- ✓ low-pressure detection
- ✓ barcode reader optional
- ✓ 3-colour alarm pole

Communication interface

- ✓ ethernet (10/100 Mbit)
- ✓ 4 x high speed RS 232 (up to 115,200 bps), optional RS 422
- ✓ I/O signals potential free

Applicator / Label sizes

- ✓ tamp
- ✓ stroke: up to 800 mm
- ✓ usable label sizes:
100 x 100 mm – 210 x 300 mm

Media specifications

- ✓ die-cut self-adhesive labels
- ✓ label roll: 800 m
- ✓ label core: 152 mm

Software

- ✓ software family (LogoPAL, LogoBatch, LogoMail, LogoTex)



- ✓ LEAP Express (label design)
- ✓ service and control tool (Control Center)
- ✓ status message via SMS with Control Center
- ✓ service-counter

Environment

- ✓ operating temperature range: 5°C - 40°C
- ✓ special solution for strong heat and frostiness
- ✓ humidity: 10% - 80 % relative, non-condensing
- ✓ power requirements: 110-230 VAC; 50/60 Hz
- ✓ air supply: 6 bars dry and clean
- ✓ CE certified, UL certification optional

RFID

- ✓ Flag-Tag
- ✓ all authorized transponders
- ✓ 13.56 MHz and UHF 868 MHz range (EPCglobal UHF Class 1 Gen 2)

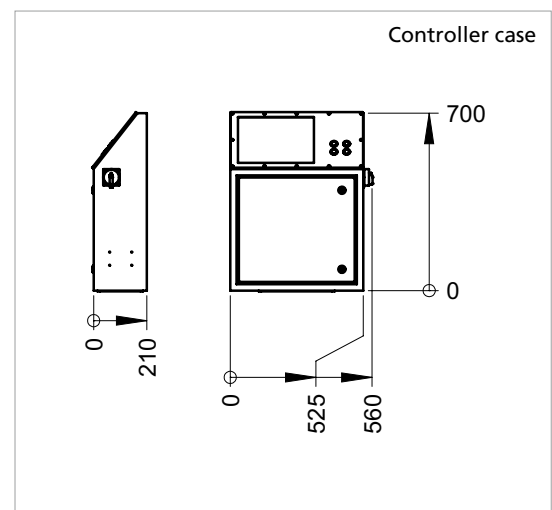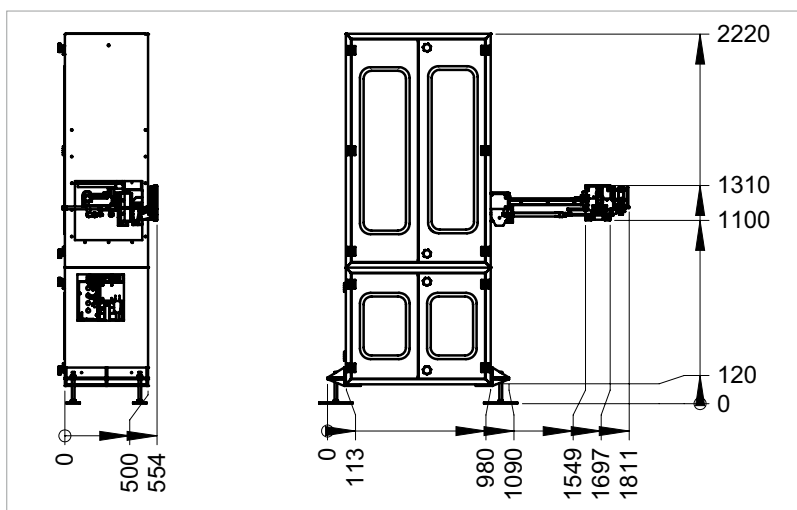

Dimensions refer to 210 mm label length and 600 mm telescope stroke.

We reserve the right to amend the design and/or specifications of our product without notice.